


PLAN

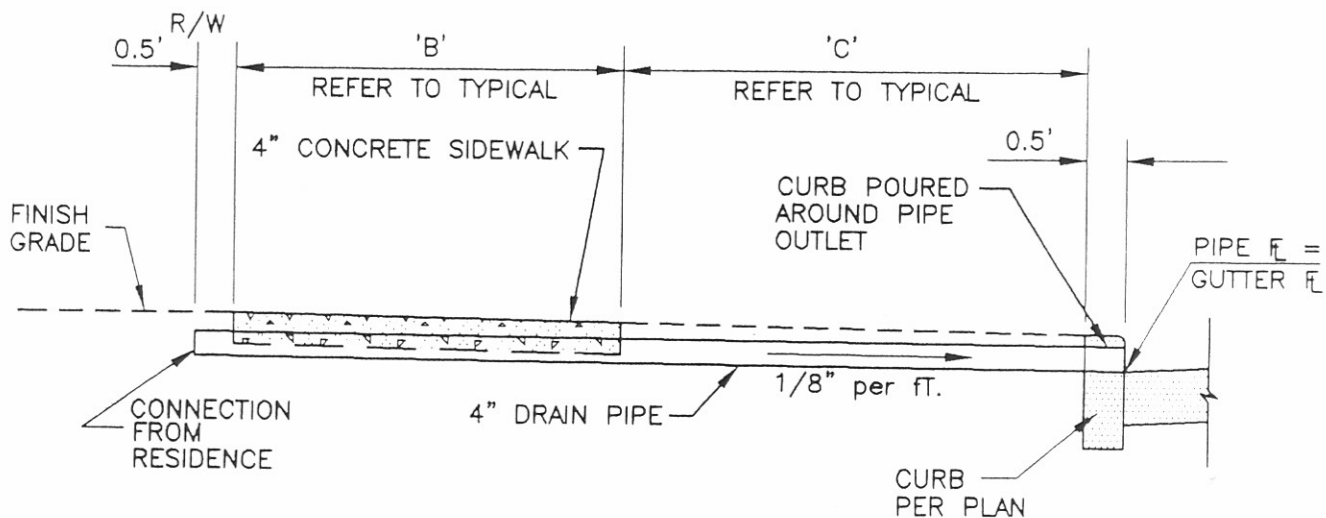

SECTION

NOTES:

1. ROOF DRAIN OUTLETS THRU CURB ARE NOT PERMITTED WHERE THERE IS NO STORM SEWER SYSTEM TO COLLECT RUN-OFF IN THE STREET.
2. CUTTING OF CURB FOR PLACEMENT OF ROOF DRAIN PIPING WILL NOT BE PERMITTED, UNLESS OTHERWISE AUTHORIZED BY THE BUILDING INSPECTOR.
3. WHERE ROOF DRAIN PIPE OUTLETS THRU CURB ARE PERMITTED, CONTRACTOR SHALL LOCATE AND PLACE DRAIN PIPE PRIOR TO FORMING OF NEW CURB AND SIDEWALK.
4. CUT TRANSVERSE JOINT IN WALK OVER CENTER OF ROOF DRAIN PIPE, EITHER SAWED, TROWEL CUT OR FORMED TO A DEPTH NOT LESS THAN ONE INCH DEEP. JOINTS TO BE 1/8 INCH MIN. WDE AND SPACED NO MORE THAN FIVE (5) FEET MAXIMUM ON CENTERS THROUGH OUT LENGTH OF SIDEWALK.

CITY OF NEW PHILADELPHIA

THRU CURB ROOF DRAIN DETAILS
WHEN CATCH BASINS ARE LOCATED ALONG CURB

STANDARD
CONSTRUCTION
DRAWING NO.

SD-22

REV. 11-00